


Accessori Accessories

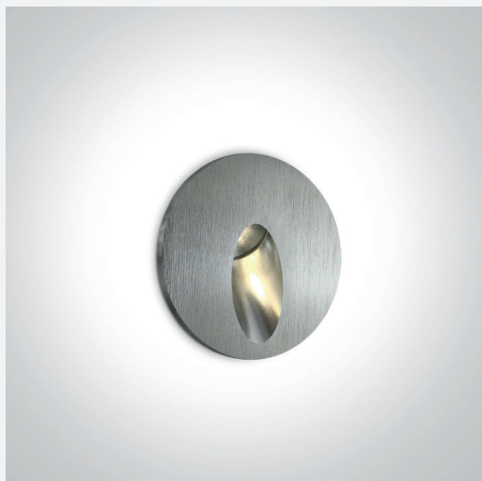

Cassaforma inclusa
Formwork included

Ø60 x 101 mm

WALK 2.0

20209.

Caratteristiche meccaniche Mechanical features

Tipo Installazione Installation type	Faretto da incasso a muro Recessed wall spotlight	
Materiale Material	Alluminio, vetro Aluminium, glass	
Finitura spot Spot Finishing	.11 .13 .14	Bianco White Nero Black Alluminio Aluminium
Grado protezione IP IP rating	IP54	
Dimensioni Dimensions	Ø62 x 45 mm	
Foro d'incasso Recess opening	52 mm	
Peso Weight	0,36 kg	
Marcatura Labelling	CE UK	
Classe Isolamento Insulation class	□	

Caratteristiche illuminotecniche Lighting features

Corrente di Alimentazione Input current	700 mA	
Driver	Remoto ON-OFF incluso Remote ON-OFF included	
Potenza (W) Power (W)	3 W	
Flusso luminoso dispositivo a 3000K Device luminous flux at 3000K	120 lm	
Efficienza luminosa dispositivo a 3000K Device luminous efficacy at 3000K	40 lm/W	
CRI - Resa Cromatica CRI - Color rendering index	>85	
Temperatura di funzionamento Operating temperature	-20°C ~ +40°C	
Vita media a Ta 25° Average lifetime at Ta 25°C	50000 hours (L80/B10)	
CCT - Temperatura Colore (K) CCT - Correlated color temperature (K)	.WW	3000K




WALK 2.0

20209.

Curve fotometriche Photometric curves

3000K



Beam intensities

