


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 97.05 lm/W
MODEL		Imax(cd)	1088	S/MH(C0/180)	0.88	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.84	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1035.5	η UP, DN(C0-180)	0.0, 50.8	
NOMINAL FLUX(lm)	1035.53	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 49.1	
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)		η down(%)	99.9	CIBSE SHR MAX	0.90	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

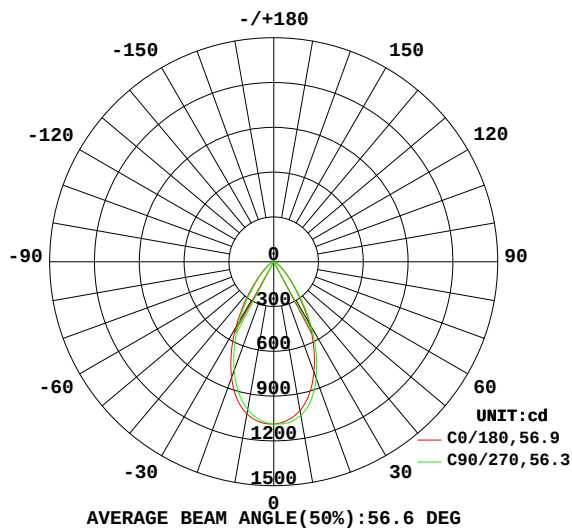

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

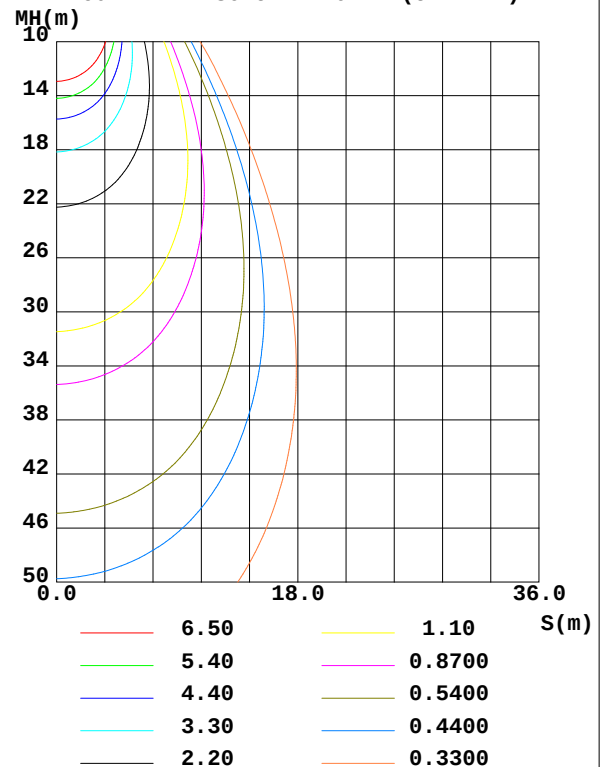

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Allen
Test Date: 2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity: 55.6%
Test Distance: 2.900m [K=0.8625]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1012	1031	1044	1042	1035	1022	1006	999.2	0- 10	100.8	100.8	9.73, 9.73
20	786.8	808.3	831.0	838.4	825.9	799.0	775.0	770.2	10- 20	259.5	360.3	34.8, 34.8
30	476.3	489.8	504.2	515.6	509.0	487.0	465.9	463.9	20- 30	296.3	656.6	63.4, 63.4
40	203.8	210.1	215.5	221.9	222.8	211.8	201.4	197.9	30- 40	209.4	865.9	83.6, 83.6
50	76.50	79.41	81.30	82.55	84.06	81.41	76.69	74.01	40- 50	103.2	969.2	93.6, 93.6
60	26.85	28.47	29.51	30.08	30.44	30.29	28.61	26.93	50- 60	44.80	1014	97.9, 97.9
70	8.390	9.191	9.523	9.858	9.635	9.290	8.891	7.938	60- 70	17.34	1031	99.6, 99.6
80	0	0	0	0	0	0	0	0	70- 80	3.301	1035	99.9, 99.9
90	0	0	0	0	0	0	0	0	80- 90	0	1035	99.9, 99.9
100	0	0	0	0	0	0	0	0	90-100	0	1035	99.9, 99.9
110	0	0	0	0	0	0	0	0	100-110	0	1035	99.9, 99.9
120	0	0	0	0	0	0	0	0	110-120	0	1035	99.9, 99.9
130	0	0	0	0	0.0000	0.0058	0.0111	0.0181	120-130	0.0002	1035	99.9, 99.9
140	0.1852	0.1650	0.1461	0.1409	0.3045	0.3191	0.3273	0.3399	130-140	0.0806	1035	99.9, 99.9
150	0.3577	0.3359	0.3203	0.3155	0.6941	0.7108	0.7199	0.7340	140-150	0.2393	1035	99.9, 99.9
160	0.5521	0.5369	0.5253	0.5162	1.001	1.018	1.023	1.033	150-160	0.3036	1035	100, 100
170	0.6927	0.6822	0.6782	0.6660	1.025	1.034	1.039	1.042	160-170	0.2311	1035	100, 100
180	0.9498	0.9323	0.9298	0.9269	0.9468	0.9326	0.9266	0.9239	170-180	0.0849	1036	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 927.69 lm

%lum = 89.6%

%lamp = 89.6%

Conical surface Flux(120deg): 1014 lm

%lum = 97.9%


%lamp = 97.9%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Allen
 Test Date: 2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.6%
 Test Distance: 2.900m [K=0.8625]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

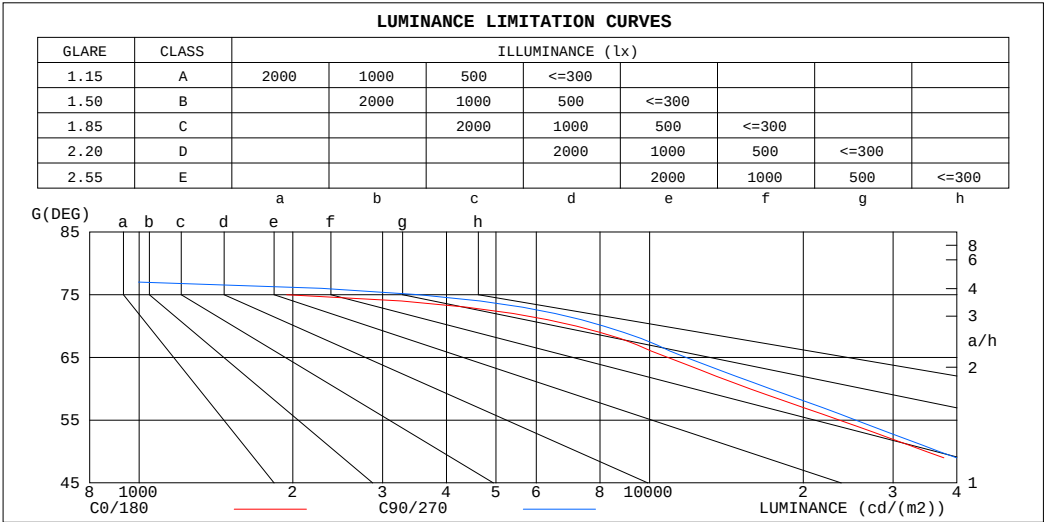


LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	0	0
75	1946	3536
70	7187	8134
65	10865	11796
60	15731	17243
55	23577	25378
50	34865	36946
45	52460	54856

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz		
Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	30%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

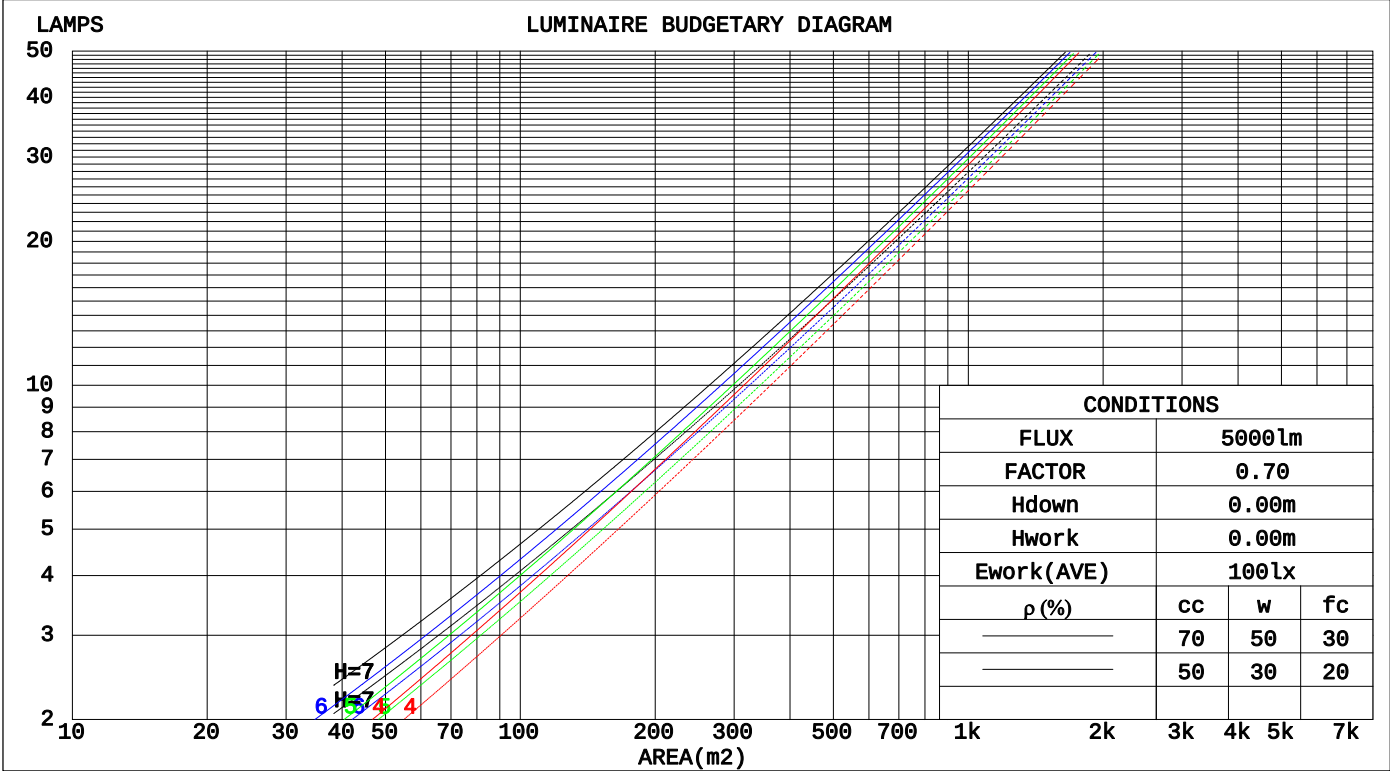

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.2℃

Operators:Allen

Test Date:2025-02-14

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459

Humidity:55.6%

Test Distance:2.900m [K=0.8625]

Remarks:

WEC AND CCEC

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm																	
NAME:						TYPE:						WEIGHT:					
SPEC.:						DIM.:						SERIAL No.:					
MFR.:						SUR.:						Shielding Angle:					

ρ_{CC}	30%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.160	.092	.030	.185	.105	.033	.172	.099	.031	.160	.092	.030	.149	.087	.028		
2.0	.159	.089	.028	.179	.099	.030	.169	.094	.029	.159	.089	.028	.149	.085	.027		
3.0	.154	.084	.026	.172	.092	.028	.163	.088	.027	.154	.084	.026	.146	.081	.025		
4.0	.148	.080	.024	.164	.086	.025	.156	.083	.025	.148	.080	.024	.142	.077	.023		
5.0	.143	.075	.022	.156	.080	.023	.149	.078	.023	.143	.075	.022	.137	.073	.022		
6.0	.137	.071	.021	.149	.075	.022	.143	.073	.021	.137	.071	.021	.131	.069	.021		
7.0	.131	.067	.020	.142	.071	.020	.137	.069	.020	.131	.067	.020	.126	.066	.019		
8.0	.126	.064	.018	.136	.067	.019	.131	.065	.019	.126	.064	.018	.122	.062	.018		
9.0	.121	.061	.017	.130	.063	.018	.125	.062	.018	.121	.061	.017	.117	.059	.017		
10.0	.116	.058	.016	.124	.060	.017	.120	.059	.017	.116	.058	.016	.113	.057	.016		

ρ_{CC}	30%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.064	.064	.064	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020		
1.0	.058	.054	.050	.148	.136	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.054	.046	.039	.136	.115	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013		
3.0	.050	.040	.032	.126	.099	.076	.087	.069	.054	.050	.040	.032	.016	.013	.010		
4.0	.047	.035	.026	.118	.086	.062	.081	.060	.043	.047	.035	.026	.015	.011	.008		
5.0	.044	.031	.021	.111	.077	.051	.077	.053	.036	.044	.031	.021	.014	.010	.007		
6.0	.042	.028	.018	.105	.069	.042	.072	.048	.030	.042	.028	.018	.014	.009	.006		
7.0	.040	.026	.015	.100	.062	.036	.069	.044	.025	.040	.026	.015	.013	.008	.005		
8.0	.038	.024	.013	.095	.057	.031	.066	.040	.022	.038	.024	.013	.012	.008	.004		
9.0	.036	.022	.011	.090	.053	.027	.063	.037	.019	.036	.022	.011	.012	.007	.004		
10.0	.035	.020	.010	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.2	22.4	23.3	23.5	22.4	23.4	22.6	23.6	23.8
3H	22.1	23.1	22.4	23.3	23.5	22.4	23.3	22.6	23.5	23.7
4H	22.0	22.9	22.3	23.2	23.4	22.3	23.2	22.6	23.4	23.7
6H	21.9	22.8	22.2	23.0	23.3	22.2	23.1	22.5	23.3	23.6
8H	21.9	22.7	22.2	23.0	23.2	22.2	23.0	22.5	23.2	23.5
12H	21.8	22.6	22.2	22.9	23.2	22.1	22.9	22.4	23.2	23.4
4H 2H	22.0	22.9	22.3	23.2	23.4	22.3	23.2	22.6	23.4	23.6
3H	22.0	22.8	22.4	23.1	23.4	22.3	23.1	22.6	23.3	23.6
4H	22.0	22.7	22.3	23.0	23.3	22.2	22.9	22.6	23.2	23.6
6H	21.9	22.5	22.3	22.8	23.2	22.1	22.8	22.5	23.1	23.4
8H	21.8	22.4	22.2	22.8	23.1	22.1	22.7	22.5	23.0	23.4
12H	21.8	22.3	22.2	22.7	23.1	22.0	22.6	22.5	22.9	23.3
8H 4H	21.9	22.4	22.2	22.8	23.1	22.1	22.7	22.5	23.0	23.4
6H	21.8	22.2	22.2	22.6	23.0	22.0	22.5	22.4	22.9	23.3
8H	21.7	22.1	22.2	22.5	23.0	22.0	22.4	22.4	22.8	23.2
12H	21.6	22.0	22.1	22.4	22.9	21.9	22.3	22.4	22.7	23.2
12H 4H	21.8	22.3	22.2	22.7	23.1	22.1	22.6	22.5	23.0	23.4
6H	21.7	22.1	22.2	22.5	23.0	22.0	22.4	22.4	22.8	23.2
8H	21.6	22.0	22.1	22.4	22.9	21.9	22.3	22.4	22.7	23.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.9 / - 3.9					+ 2.0 / - 3.7				
1.5H	+ 2.8 / - 2.7					+ 2.9 / - 2.7				
2.0H	+ 3.7 / - 3.8					+ 3.7 / - 3.8				

CIE Pub.117, 1036 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.1$)
Area: 0.0034212 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	81	74	69	81	73	69	80	73	69	65
0.80	89	82	78	89	82	78	87	81	78	73
1.00	95	89	84	94	88	84	93	88	83	79
1.25	100	94	90	99	93	89	97	92	89	84
1.50	103	98	94	102	97	93	99	95	92	87
2.00	107	102	98	105	101	97	102	99	96	90
2.50	109	104	101	107	103	100	104	101	98	92
3.00	110	107	103	109	105	102	105	102	100	93
4.00	113	110	107	111	108	106	107	105	103	95
5.00	114	111	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Allen
 Test Date: 2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.6%
 Test Distance: 2.900m [K=0.8625]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

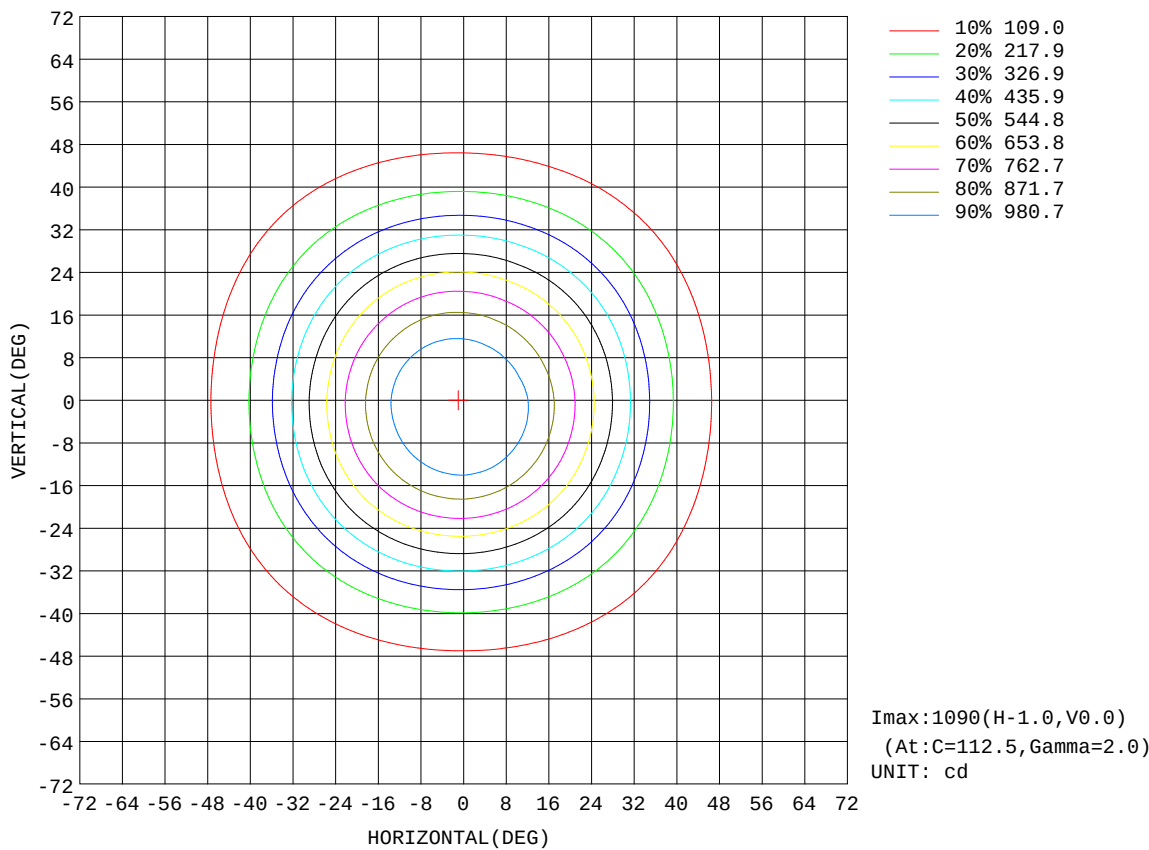


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

AAI Figure

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

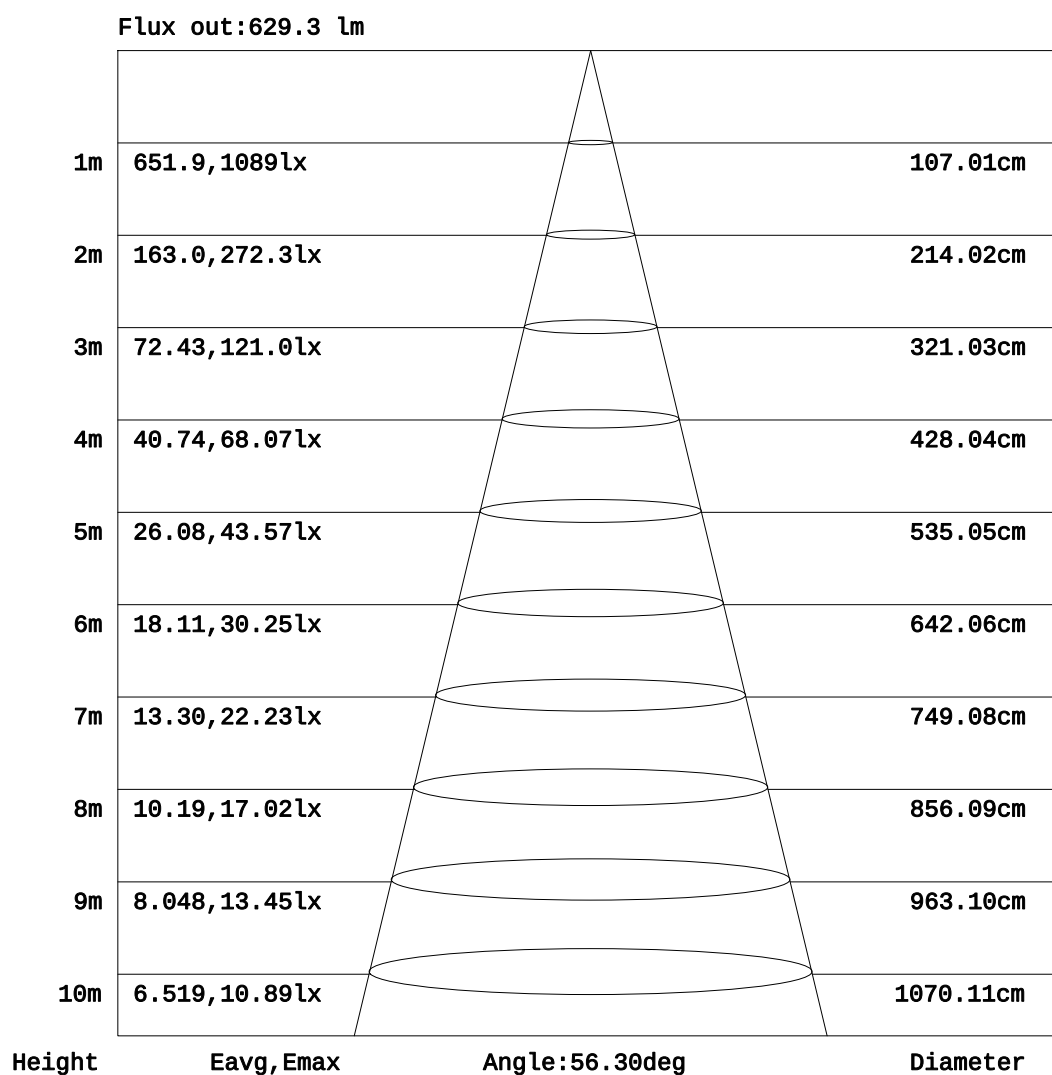


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

ISOLUX DIAGRAM


Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

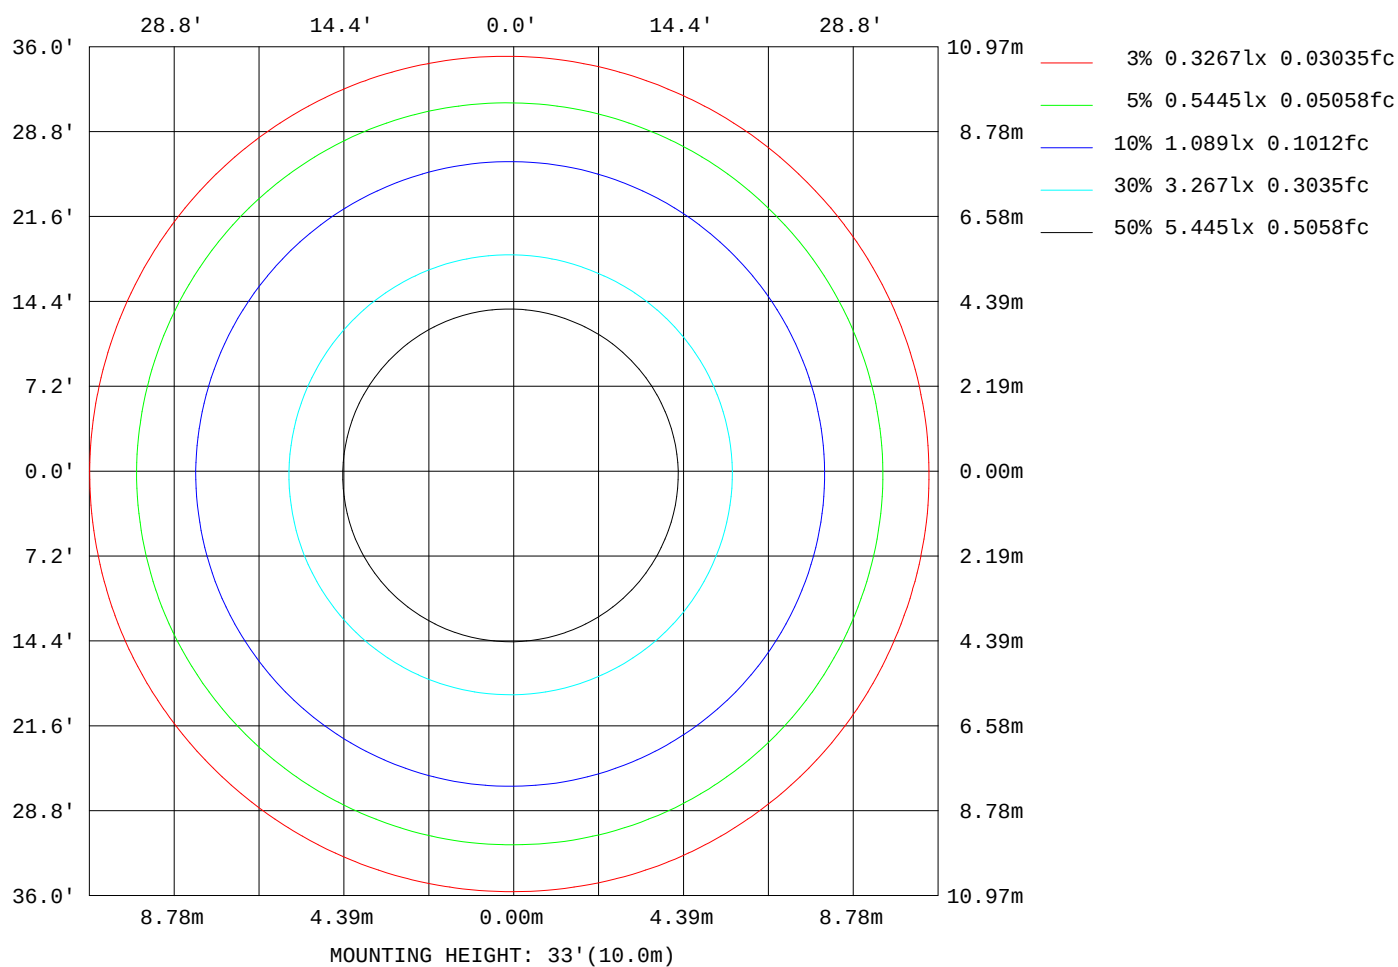

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Allen
Test Date: 2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity: 55.6%
Test Distance: 2.900m [K=0.8625]
Remarks:

Planar Illuminance Curve

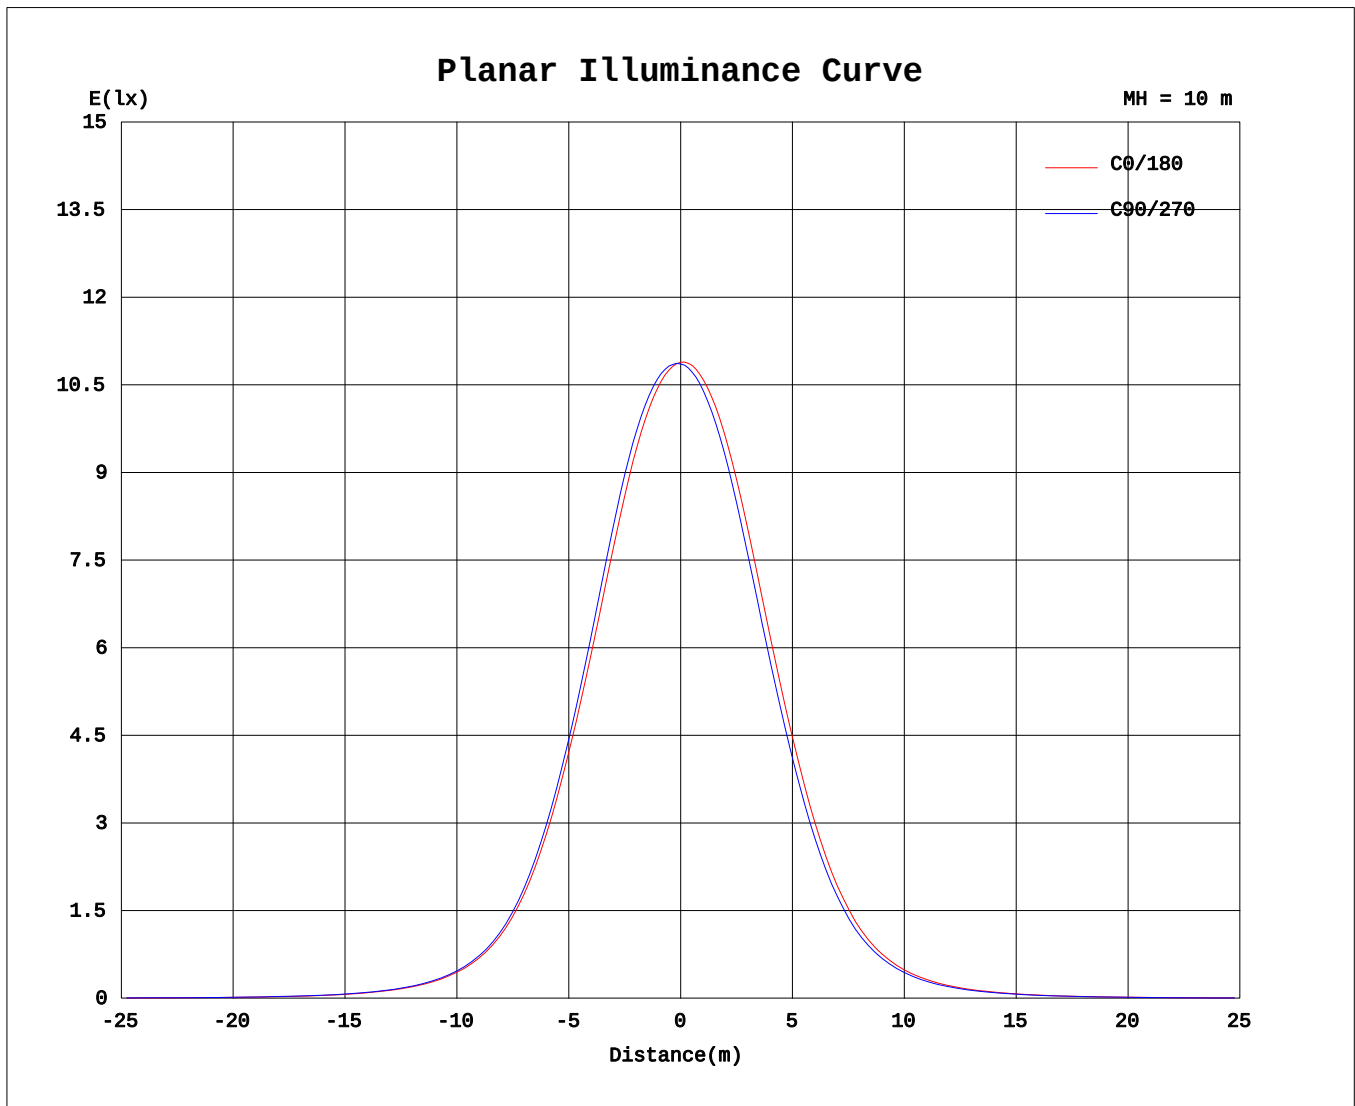

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Allen
Test Date: 2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity: 55.6%
Test Distance: 2.900m [K=0.8625]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.0537A P:10.67W PF:0.9030 Freq:50.00Hz Lamp Flux:1035.53x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

C (DEG) \ γ (DEG)		0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0		1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086	1086			
5		1066	1071	1076	1079	1082	1082	1080	1079	1077	1075	1072	1067	1064	1061	1060	1062			
10		1012	1022	1031	1039	1044	1044	1042	1039	1035	1029	1022	1013	1006	999	999	1004			
15		918	929	941	953	962	964	962	960	951	942	930	919	908	900	901	908			
20		787	796	808	820	831	836	838	836	826	814	799	787	775	768	770	777			
25		636	643	654	663	672	679	685	684	674	661	648	636	624	617	622	630			
30		476	481	490	496	504	512	516	517	509	498	487	476	466	460	464	472			
35		323	327	332	336	343	349	352	354	350	342	333	325	318	315	316	321			
40		204	207	210	213	216	219	222	224	223	218	212	206	201	199	198	201			
45		127	128	131	134	133	133	136	138	137	135	132	129	125	122	121	124			
50		76.5	77.6	79.4	80.9	81.3	81.9	82.5	84.0	84.1	83.0	81.4	79.5	76.7	74.2	74.0	75.3			
55		46.2	47.1	48.3	49.4	49.8	50.2	50.7	51.2	51.4	51.0	50.2	48.9	47.2	45.6	45.1	45.5			
60		26.8	27.5	28.5	29.1	29.5	29.8	30.1	30.3	30.4	30.8	30.3	29.6	28.6	27.5	26.9	26.9			
65		15.7	16.1	16.6	16.9	17.1	17.4	17.6	17.7	17.8	17.7	17.6	17.4	16.9	16.2	15.7	15.6			
70		8.39	8.75	9.19	9.40	9.52	9.73	9.86	9.92	9.64	9.43	9.29	9.18	8.89	8.36	7.94	7.95			
75		1.72	2.25	2.75	2.92	3.13	3.44	3.43	3.45	3.14	2.73	2.43	1.98	1.67	1.52	1.38	1.48			
80		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02			
135		0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.13	0.13	0.14	0.15	0.15	0.15	0.16	0.16			
140		0.19	0.18	0.17	0.15	0.15	0.14	0.14	0.14	0.30	0.31	0.32	0.32	0.33	0.33	0.34	0.34			
145		0.28	0.27	0.26	0.24	0.24	0.23	0.23	0.23	0.51	0.51	0.52	0.53	0.53	0.54	0.55	0.55			
150		0.36	0.35	0.34	0.32	0.32	0.32	0.32	0.31	0.69	0.70	0.71	0.72	0.72	0.73	0.73	0.75			
155		0.47	0.47	0.45	0.44	0.44	0.44	0.43	0.43	0.87	0.88	0.89	0.89	0.90	0.90	0.91	0.93			
160		0.55	0.55	0.54	0.53	0.53	0.52	0.52	0.51	1.00	1.01	1.02	1.02	1.02	1.03	1.03	1.04			
165		0.61	0.60	0.60	0.60	0.59	0.59	0.58	0.57	1.03	1.03	1.05	1.05	1.05	1.05	1.05	1.06			
170		0.69	0.69	0.68	0.68	0.68	0.67	0.67	0.66	1.03	1.03	1.03	1.04	1.04	1.04	1.04	1.05			
175		0.83	0.82	0.82	0.81	0.81	0.81	0.80	0.80	1.00	1.00	1.01	1.01	1.01	1.00	1.00	1.01			
180		0.95	0.94	0.93	0.93	0.93	0.93	0.93	0.92	0.95	0.94	0.93	0.93	0.93	0.93	0.92	0.92			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks: