


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 92.19 lm/W
MODEL		Imax(cd)	8290	S/MH(C0/180)	0.42	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.46	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1930.5	η UP, DN(C0-180)	0.0, 44.9	
NOMINAL FLUX(lm)	1930.47	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 54.9	
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)		η down(%)	99.8	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

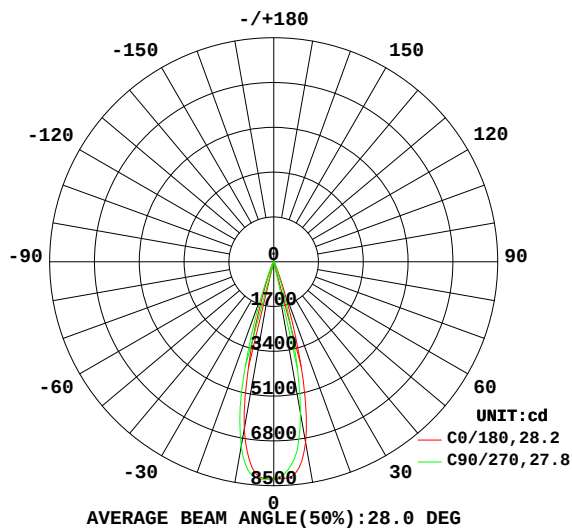

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

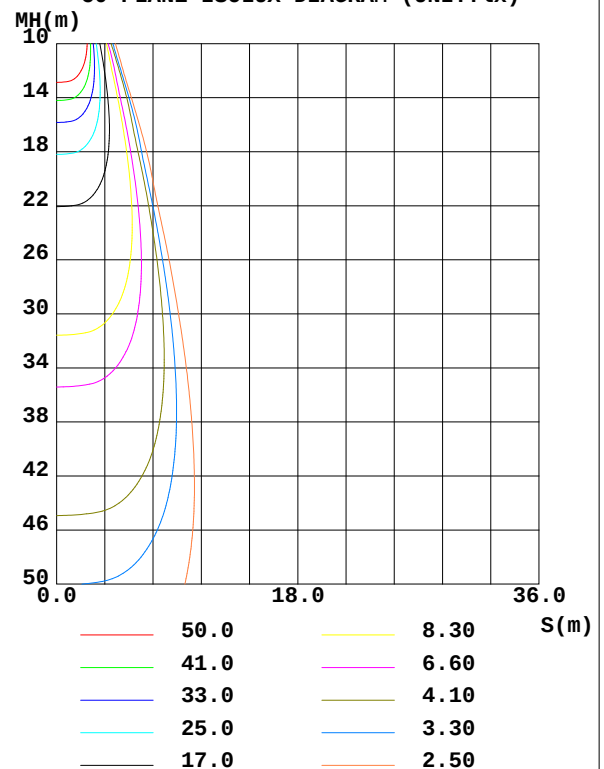

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Allen
Test Date: 2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity: 55.6%
Test Distance: 2.900m [K=0.8625]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6959	6207	5858	5972	6445	6953	7113	7298	0- 10	722.8	722.8	37.4, 37.4
20	1113	759.6	567.7	561.2	787.0	1080	1303	1363	10- 20	920.0	1643	85.1, 85.1
30	120.9	104.2	104.1	105.7	119.8	132.6	134.1	134.2	20- 30	140.4	1783	92.4, 92.4
40	56.40	52.97	52.98	54.01	58.38	62.67	64.98	62.12	30- 40	49.97	1833	95, 95
50	43.05	40.14	37.18	36.27	39.28	43.90	46.71	46.36	40- 50	37.83	1871	96.9, 96.9
60	29.84	27.33	25.36	25.06	27.24	30.13	32.64	33.33	50- 60	31.17	1902	98.5, 98.5
70	12.14	10.92	9.927	9.273	10.17	11.92	13.98	14.50	60- 70	20.30	1923	99.6, 99.6
80	0	0	0	0	0	0.0015	0	0	70- 80	4.625	1927	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	0.0001	1927	99.8, 99.8
100	0	0	0	0	0	0	0	0	90-100	0	1927	99.8, 99.8
110	0	0	0	0	0	0	0	0	100-110	0	1927	99.8, 99.8
120	0	0	0	0	0	0	0	0	110-120	0	1927	99.8, 99.8
130	0	0	0	0	0	0	0	0	120-130	0	1927	99.8, 99.8
140	0.5527	0.5874	0.5964	0.6570	0.9359	0.8058	0.7045	0.7479	130-140	0.1577	1927	99.8, 99.8
150	1.187	1.187	1.175	1.276	2.998	2.887	2.674	2.780	140-150	0.8452	1928	99.9, 99.9
160	1.587	1.469	1.428	1.562	4.719	4.814	4.757	4.843	150-160	1.236	1929	99.9, 99.9
170	1.202	1.150	1.196	1.264	3.718	3.895	4.123	4.237	160-170	0.8460	1930	100, 100
180	1.766	1.966	2.157	2.247	1.772	1.873	2.065	2.214	170-180	0.2259	1930	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 1852.8 lm

%lum = 96.0%

%lamp = 96.0%

Conical surface Flux(120deg): 1902.2 lm

%lum = 98.5%


%lamp = 98.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.2°C
 Operators: Allen
 Test Date: 2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
 Humidity: 55.6%
 Test Distance: 2.900m [K=0.8625]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

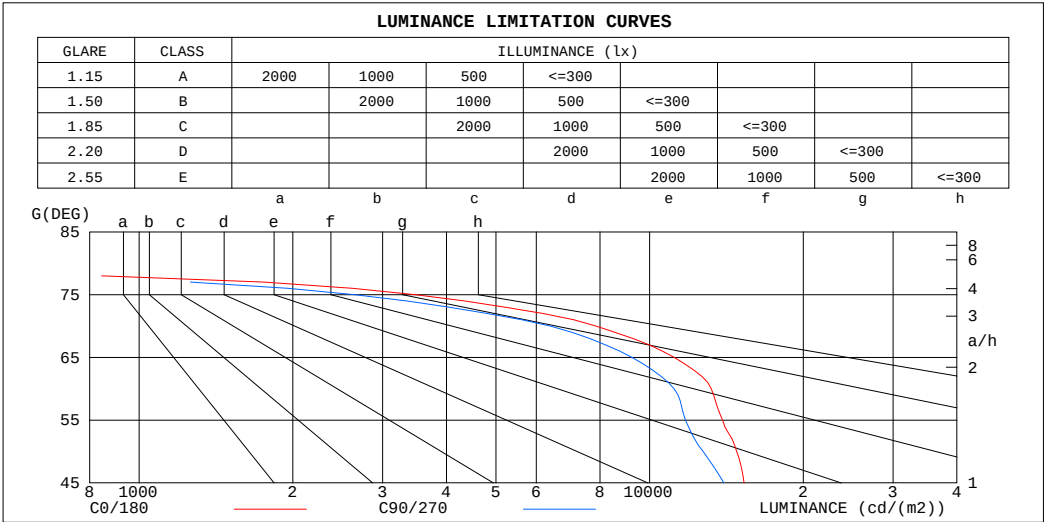

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	0	0
75	3480	2648
70	7857	6396
65	11176	9242
60	13206	11175
55	13900	11763
50	14821	12745
45	15313	13984


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz		
Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	30%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

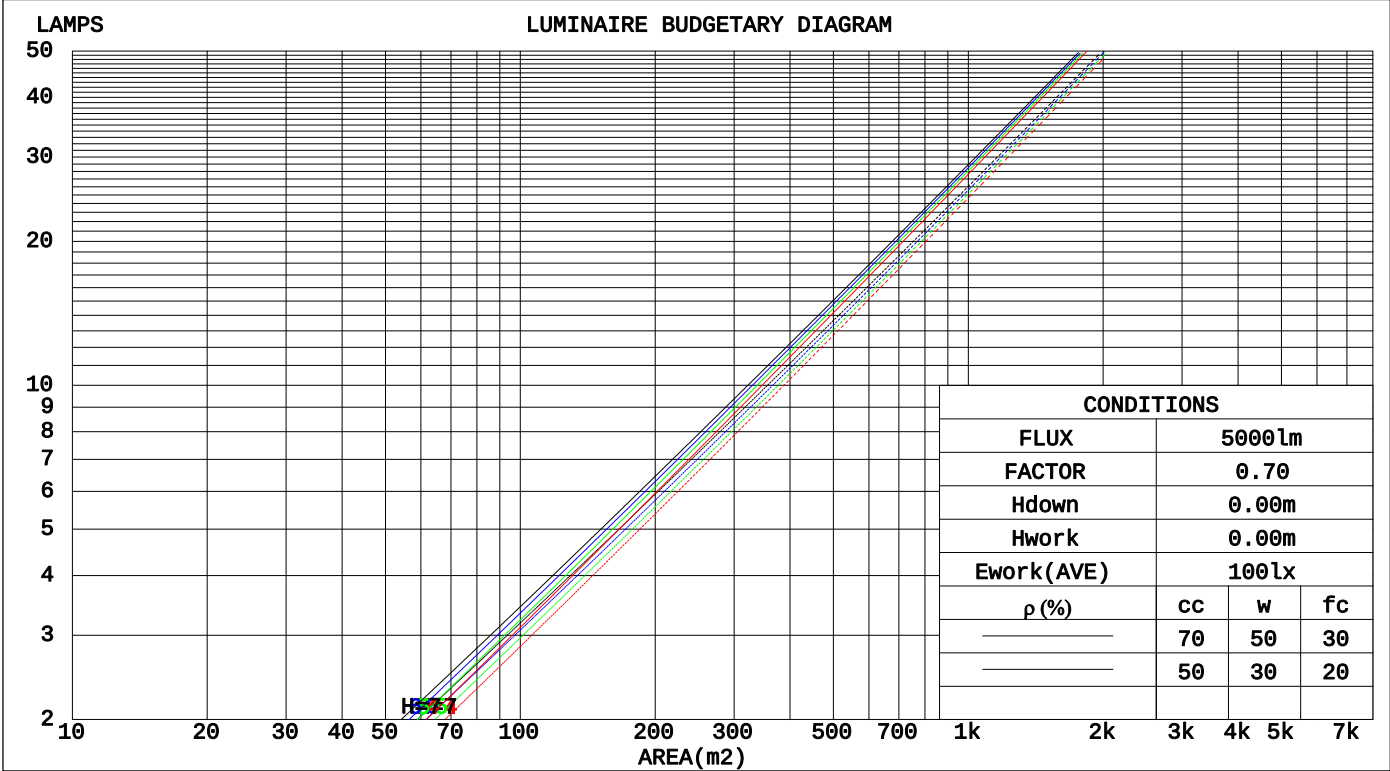

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.2℃

Operators:Allen

Test Date:2025-02-14

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459

Humidity:55.6%

Test Distance:2.900m [K=0.8625]

Remarks:

WEC AND CCEC

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm																	
NAME:						TYPE:						WEIGHT:					
SPEC.:						DIM.:						SERIAL No.:					
MFR.:						SUR.:						Shielding Angle:					

ρ_{CC}	30%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.109	.063	.020	.133	.076	.024	.120	.069	.022	.109	.063	.020	.098	.057	.018	
2.0	.104	.058	.018	.124	.068	.021	.114	.063	.020	.104	.058	.018	.095	.054	.017	
3.0	.099	.054	.017	.116	.062	.019	.107	.058	.018	.099	.054	.017	.092	.051	.016	
4.0	.094	.051	.015	.109	.057	.017	.101	.054	.016	.094	.051	.015	.088	.048	.015	
5.0	.090	.048	.014	.102	.052	.015	.096	.050	.015	.090	.048	.014	.085	.045	.014	
6.0	.086	.045	.013	.096	.049	.014	.091	.047	.014	.086	.045	.013	.081	.043	.013	
7.0	.082	.042	.012	.091	.046	.013	.087	.044	.013	.082	.042	.012	.078	.041	.012	
8.0	.079	.040	.012	.087	.043	.012	.083	.041	.012	.079	.040	.012	.075	.039	.011	
9.0	.076	.038	.011	.083	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
10.0	.073	.036	.010	.079	.038	.011	.076	.037	.010	.073	.036	.010	.070	.035	.010	

ρ_{CC}	30%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.064	.064	.064	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021		
1.0	.057	.054	.052	.145	.136	.128	.099	.094	.089	.057	.054	.052	.018	.017	.017		
2.0	.051	.046	.042	.130	.115	.103	.089	.080	.072	.051	.046	.042	.016	.015	.014		
3.0	.047	.040	.035	.117	.099	.084	.081	.069	.059	.047	.040	.035	.015	.013	.011		
4.0	.042	.035	.029	.107	.086	.070	.073	.060	.049	.042	.035	.029	.014	.011	.010		
5.0	.039	.031	.024	.098	.075	.058	.067	.053	.041	.039	.031	.024	.013	.010	.008		
6.0	.036	.027	.021	.090	.067	.050	.062	.047	.035	.036	.027	.021	.012	.009	.007		
7.0	.034	.025	.018	.084	.060	.043	.058	.042	.030	.034	.025	.018	.011	.008	.006		
8.0	.031	.022	.016	.078	.054	.037	.054	.038	.026	.031	.022	.016	.010	.007	.005		
9.0	.029	.020	.014	.073	.049	.032	.051	.034	.023	.029	.020	.014	.010	.007	.005		
10.0	.028	.019	.012	.069	.045	.029	.048	.031	.020	.028	.019	.012	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm											
NAME:			TYPE:			WEIGHT:					
SPEC.:			DIM.:			SERIAL No.:					
MFR.:			SUR.:			Shielding Angle:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	2H	14.2	14.8	14.4	15.0	15.1	13.5	14.1	13.7	14.3	14.4
	3H	15.0	15.6	15.3	15.8	16.0	14.2	14.8	14.5	15.0	15.2
	4H	15.1	15.6	15.3	15.9	16.1	14.3	14.9	14.5	15.1	15.3
	6H	15.0	15.5	15.3	15.8	16.0	14.2	14.7	14.5	15.0	15.2
	8H	14.9	15.5	15.2	15.7	16.0	14.1	14.7	14.4	14.9	15.2
	12H	14.9	15.4	15.2	15.7	15.9	14.1	14.6	14.4	14.9	15.1
4H	2H	14.6	15.2	14.8	15.4	15.6	14.0	14.6	14.3	14.8	15.0
	3H	15.5	16.0	15.8	16.3	16.5	14.8	15.3	15.1	15.6	15.9
	4H	15.5	16.0	15.9	16.3	16.6	14.9	15.3	15.2	15.6	15.9
	6H	15.4	15.9	15.8	16.2	16.5	14.8	15.2	15.1	15.5	15.9
	8H	15.4	15.8	15.8	16.1	16.5	14.7	15.1	15.1	15.4	15.8
	12H	15.3	15.7	15.7	16.1	16.4	14.7	15.0	15.1	15.4	15.8
8H	4H	15.4	15.8	15.8	16.2	16.5	14.8	15.2	15.2	15.5	15.9
	6H	15.3	15.7	15.8	16.1	16.5	14.7	15.0	15.1	15.4	15.8
	8H	15.3	15.6	15.7	16.0	16.4	14.6	14.9	15.1	15.3	15.8
	12H	15.2	15.5	15.7	15.9	16.4	14.6	14.8	15.0	15.2	15.7
12H	4H	15.4	15.7	15.8	16.1	16.5	14.7	15.1	15.1	15.5	15.9
	6H	15.3	15.6	15.7	16.0	16.4	14.6	14.9	15.1	15.3	15.8
	8H	15.2	15.5	15.7	15.9	16.4	14.6	14.8	15.0	15.2	15.7
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.3 / - 0.5				+ 0.4 / - 0.6					
1.5H		+ 0.3 / - 0.4				+ 0.2 / - 0.3					
2.0H		+ 0.6 / - 1.0				+ 0.4 / - 0.5					

CIE Pub.117, 1930 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.3$)
Area: 0.004536 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	79	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	94	91	99	94	91	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.2℃
 Operators:Allen
 Test Date:2025-02-14

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
 Humidity:55.6%
 Test Distance:2.900m [K=0.8625]
 Remarks:


ISOCANDELA DIAGRAM

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

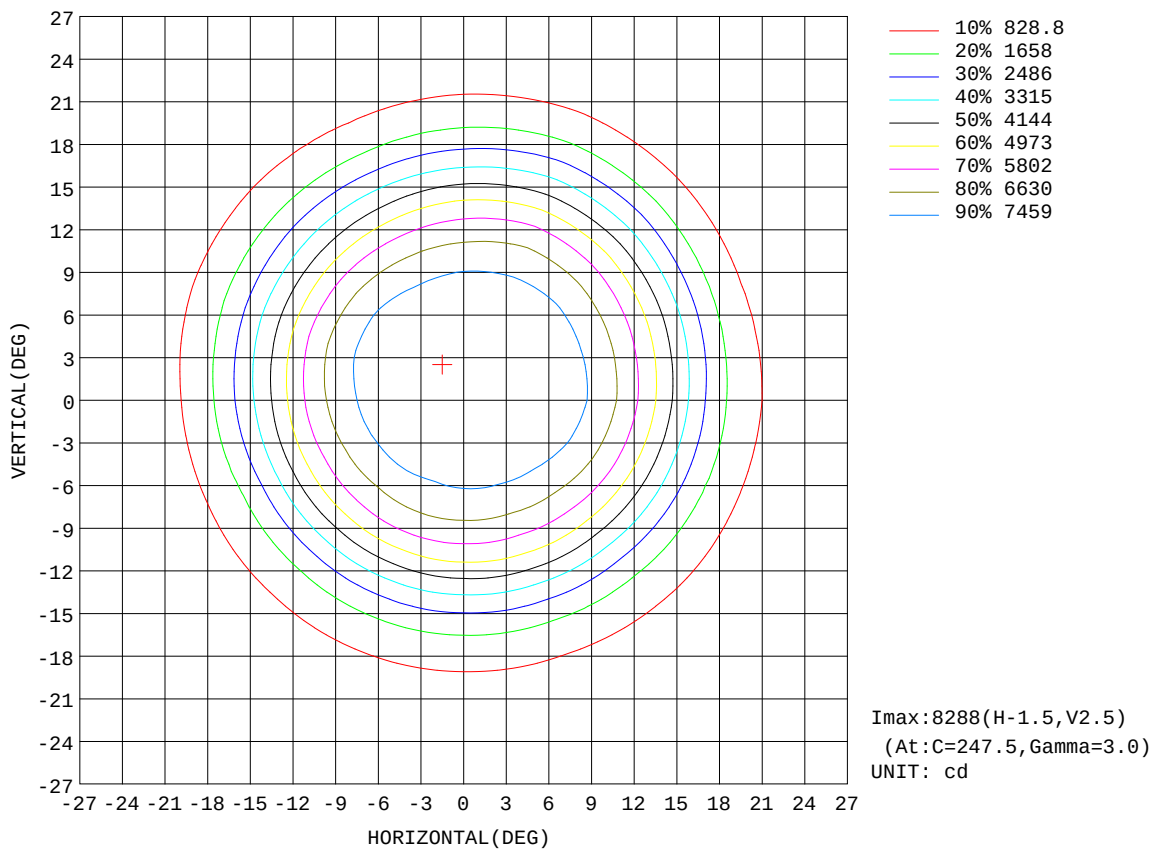

AAI Figure

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

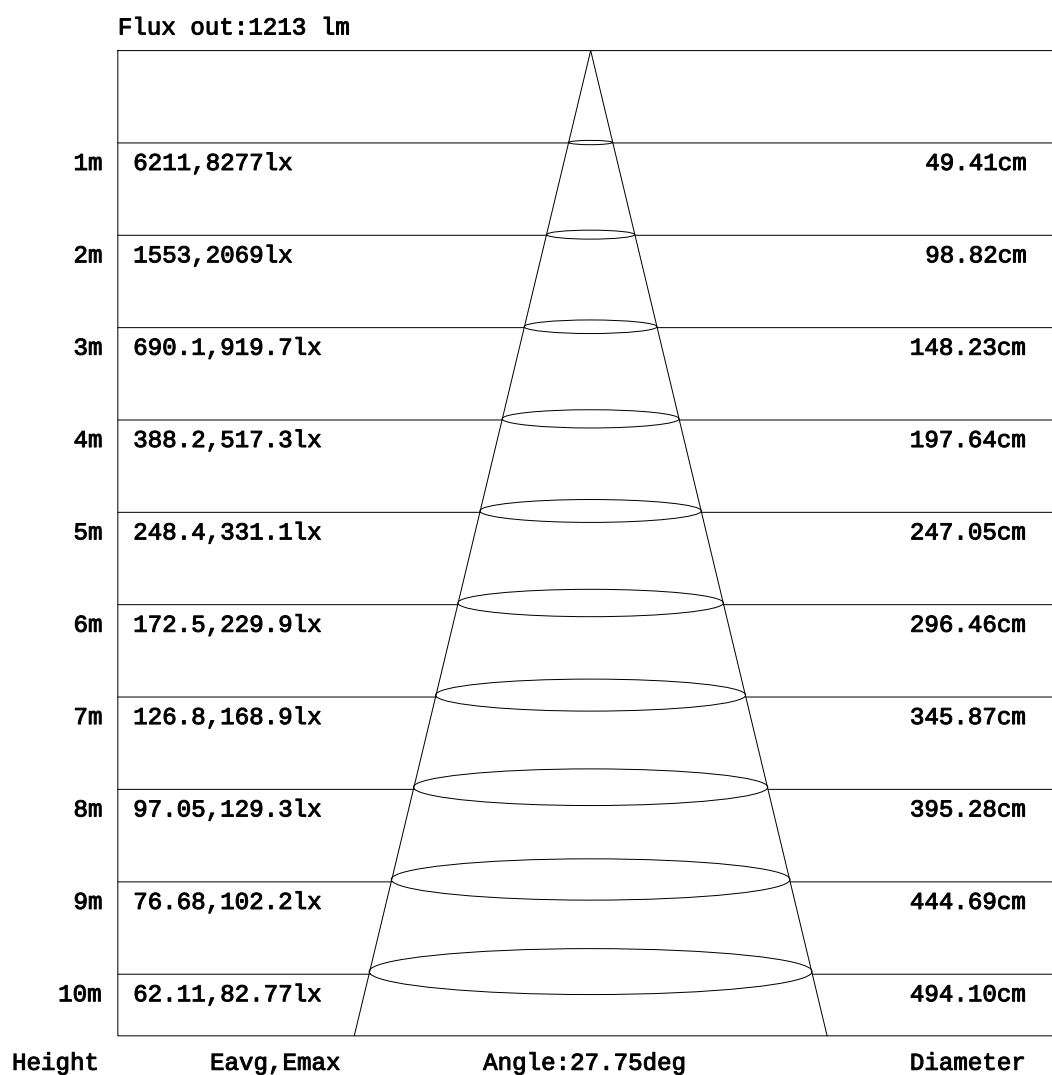


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks:

ISOLUX DIAGRAM


Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

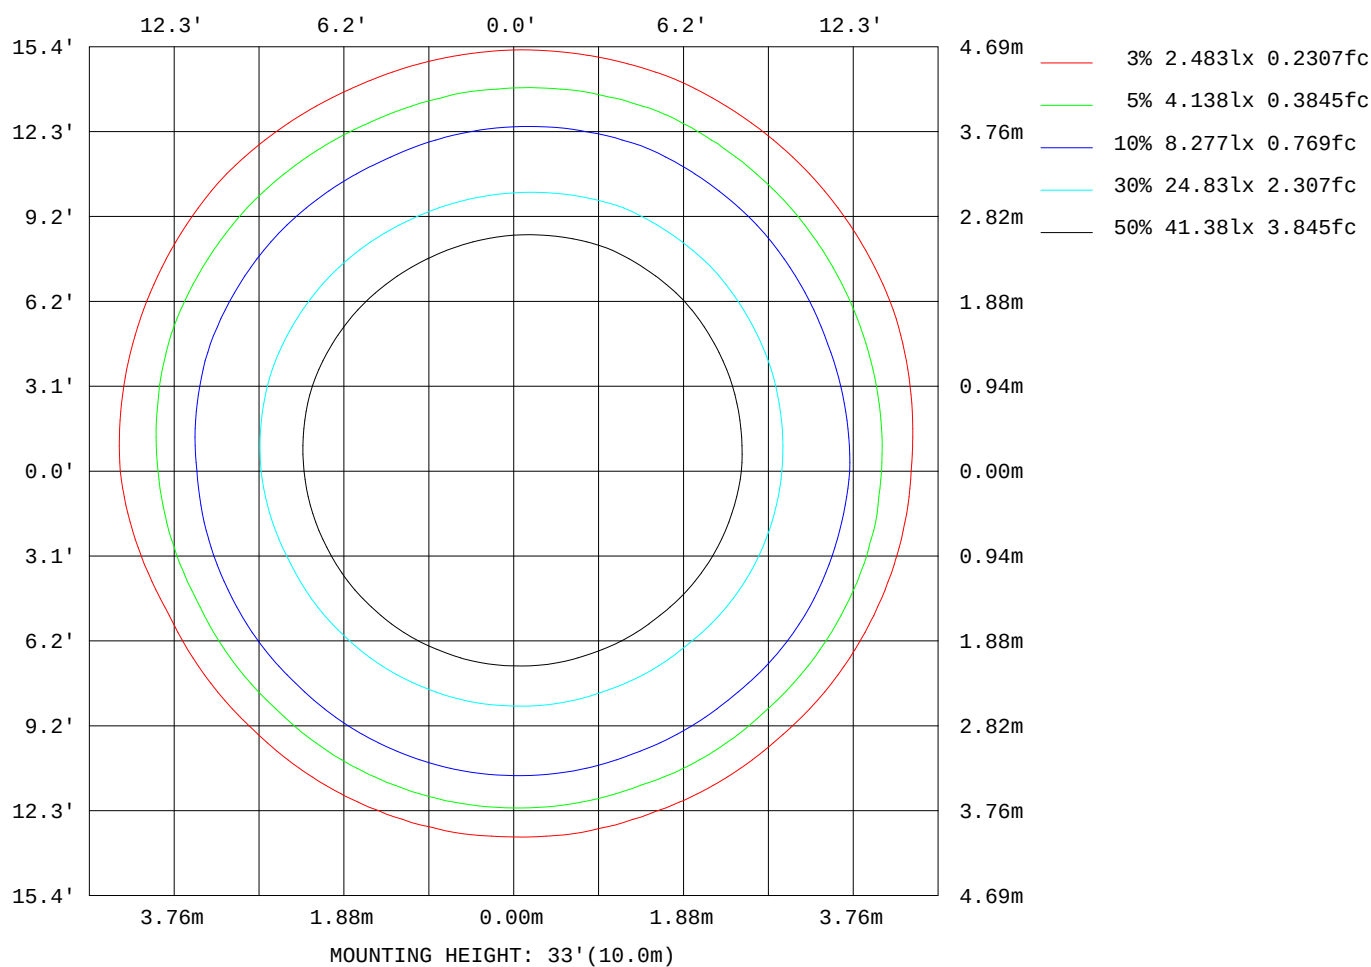

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.2°C
Operators: Allen
Test Date: 2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity: 55.6%
Test Distance: 2.900m [K=0.8625]
Remarks:

Planar Illuminance Curve

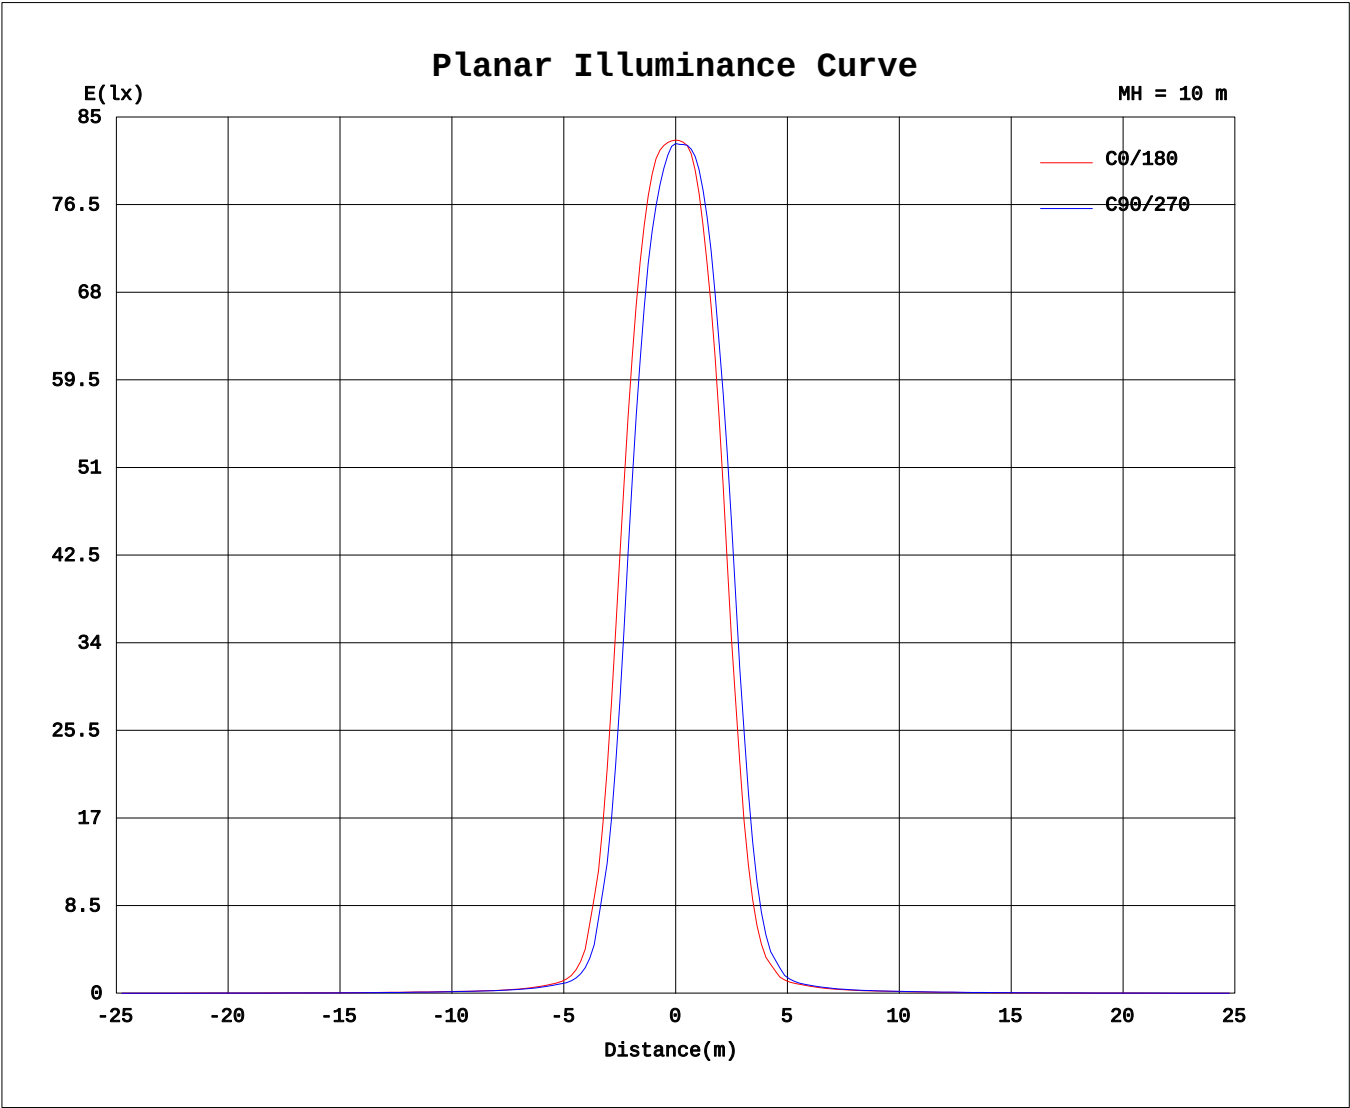

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.0993A P:20.94W PF:0.9578 Freq:50.01Hz Lamp Flux:1930.47x1 lm																		
NAME:									TYPE:					WEIGHT:				
SPEC.:									DIM.:					SERIAL No.:				
MFR.:									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

C(°) \ γ (°)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246	8246			
5	8159	8050	7935	7818	7727	7732	7819	7911	8045	8088	8203	8204	8215	8218	8227	8196			
10	6959	6619	6207	5948	5858	5889	5972	6166	6445	6781	6953	6977	7113	7271	7298	7137			
15	3888	3400	2875	2578	2461	2435	2511	2723	3146	3543	3731	3960	4302	4590	4550	4284			
20	1113	946	760	589	568	558	561	626	787	986	1080	1133	1303	1440	1363	1194			
25	233	203	181	168	164	164	166	180	210	248	296	305	331	347	323	292			
30	121	112	104	104	104	106	106	110	120	130	133	127	134	136	134	129			
35	75.3	71.1	68.1	68.6	69.1	69.3	69.0	70.5	76.2	82.0	83.1	81.1	88.1	90.2	84.4	78.7			
40	56.4	54.6	53.0	52.4	53.0	54.0	54.0	54.2	58.4	61.5	62.7	60.7	65.0	65.5	62.1	58.1			
45	48.9	47.6	46.1	44.3	44.9	44.7	44.8	45.1	48.3	51.0	53.1	51.6	55.3	55.0	52.5	49.2			
50	43.1	41.5	40.1	37.3	37.2	36.5	36.3	37.7	39.3	41.8	43.9	43.2	46.7	47.4	46.4	44.8			
55	36.0	34.6	33.3	30.8	30.6	30.3	30.5	32.1	32.6	34.3	35.8	35.7	38.5	40.0	39.8	38.9			
60	29.8	28.5	27.3	25.8	25.4	25.1	25.1	26.5	27.2	28.8	30.1	30.8	32.6	33.7	33.3	32.5			
65	21.3	20.1	19.2	18.2	17.7	17.3	17.3	18.2	19.2	20.5	22.0	22.8	24.3	25.0	24.7	23.6			
70	12.1	11.3	10.9	10.4	9.93	9.47	9.27	9.76	10.2	10.9	11.9	12.8	14.0	14.7	14.5	13.7			
75	4.07	3.62	3.35	3.25	3.11	2.99	2.87	2.84	3.15	3.39	3.62	4.08	4.79	5.53	5.45	4.85			
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.09	0.11	0.12	0.13	0.15	0.17	0.18	0.17	0.22	0.18	0.15	0.12	0.11	0.10	0.12	0.13			
140	0.55	0.57	0.59	0.60	0.60	0.63	0.66	0.67	0.94	0.87	0.81	0.76	0.70	0.71	0.75	0.78			
145	0.96	0.96	0.98	0.98	0.95	1.01	1.05	1.08	1.96	1.89	1.82	1.75	1.63	1.67	1.72	1.77			
150	1.19	1.18	1.19	1.17	1.18	1.23	1.28	1.31	3.00	2.95	2.89	2.82	2.67	2.68	2.78	2.82			
155	1.57	1.56	1.52	1.47	1.48	1.53	1.60	1.65	4.10	4.09	4.07	4.02	3.89	3.87	4.00	4.04			
160	1.59	1.53	1.47	1.43	1.43	1.48	1.56	1.64	4.72	4.74	4.81	4.83	4.76	4.74	4.84	4.91			
165	1.37	1.31	1.27	1.26	1.27	1.31	1.37	1.44	4.41	4.45	4.58	4.67	4.71	4.73	4.79	4.84			
170	1.20	1.17	1.15	1.18	1.20	1.23	1.26	1.32	3.72	3.75	3.89	4.03	4.12	4.19	4.24	4.27			
175	1.26	1.18	1.18	1.22	1.26	1.31	1.34	1.36	2.80	2.82	3.00	3.24	3.28	3.60	3.44	3.45			
180	1.77	1.87	1.97	2.07	2.16	2.22	2.25	2.22	1.77	1.79	1.87	1.97	2.07	2.16	2.21	2.24			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.2℃
Operators:Allen
Test Date:2025-02-14

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-R5000_V2 SYSTEM V2.00.459
Humidity:55.6%
Test Distance:2.900m [K=0.8625]
Remarks: