


CODE COMPOSITION: type + cover + finishing + color (+ more features) + xxxx mm

Tutti i parametri tecnici si riferiscono alla lampada nella sua lunghezza massima
All technical features refer to the lighting fixture in its maximum length

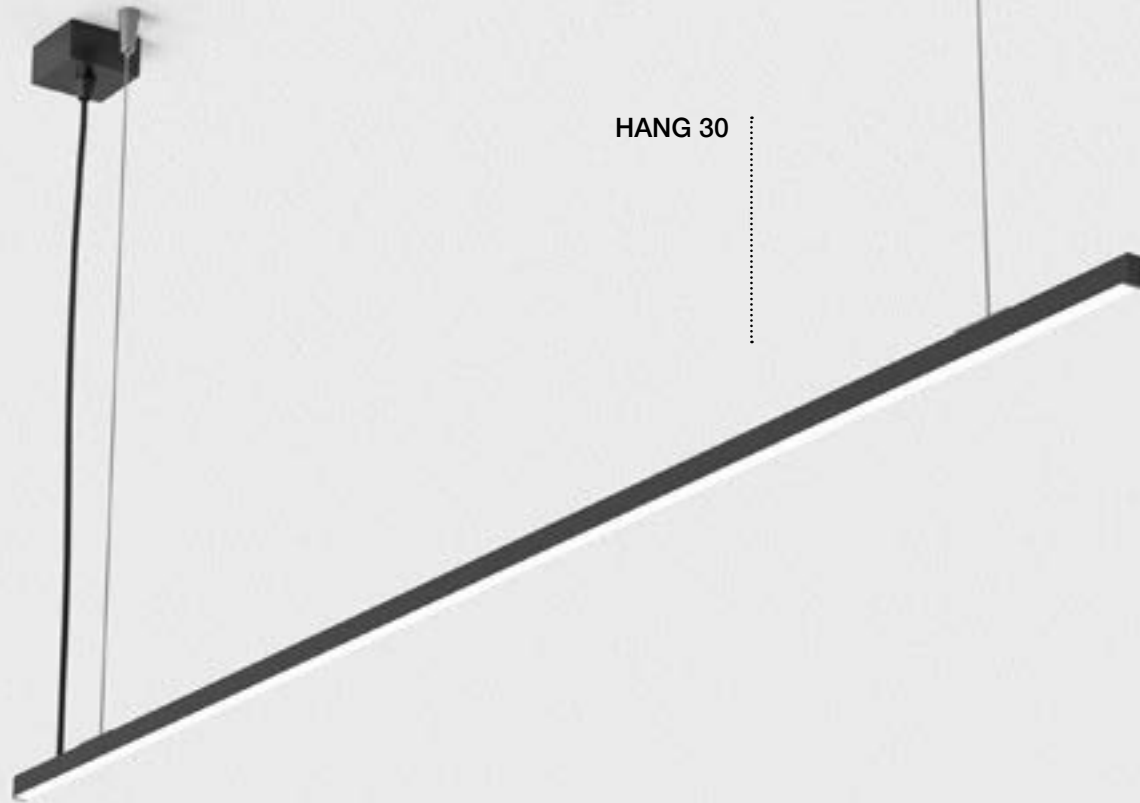

HANG 30

FINISHING

---.14

---.18



CROMALINE




HANG 30.1 | 12,5 W | 24 V | 1250 Lm | CRI > 90

IP40 A++




TYPE

73001



each length from
200 mm to 1000 mm



Cover

Transp	.1
Opal	.2

Finishing

Anod. Alum	.14
Anod. Black	.18

Color

2700 K	.EW
3000 K	.WW
3500 K	.LW
4000 K	.NW

Accessories

D.30.100

Alimentation
intégrée
Netzteil in der
Deckenrosette



Driver externe
Externes Netzteil
Pag. 454




More features

Emergency 1-3 H	.33	DALI 1-10 V, switch DIM	.44	CROMALINE	Pag. 014
-----------------	-----	-------------------------	-----	-----------	----------


HANG 30.2 | 19 W | 24 V | 1900 Lm | CRI > 90

IP40 A++




TYPE

73002



each length from
1001 mm to 1500 mm



Cover

Transp	.1
Opal	.2

Finishing

Anod. Alum	.14
Anod. Black	.18

Color

2700 K	.EW
3000 K	.WW
3500 K	.LW
4000 K	.NW

Accessories

D.30.150

Alimentation
intégrée
Netzteil in der
Deckenrosette



Driver externe
Externes Netzteil
Pag. 454




More features

Emergency 1-3 H	.33	DALI 1-10 V, switch DIM	.44	CROMALINE	Pag. 014
-----------------	-----	-------------------------	-----	-----------	----------


HANG 30.3 | 25 W | 24 V | 2500 Lm | CRI > 90

IP40 A++




TYPE

73003



each length from
1501 mm to 2000 mm



Cover

Transp	.1
Opal	.2

Finishing

Anod. Alum	.14
Anod. Black	.18

Color

2700 K	.EW
3000 K	.WW
3500 K	.LW
4000 K	.NW

Accessories

D.30.200

Alimentation
intégrée
Netzteil in der
Deckenrosette



Driver externe
Externes Netzteil
Pag. 454



More features

Emergency 1-3 H	.33	DALI 1-10 V, switch DIM	.44	CROMALINE	Pag. 014
-----------------	-----	-------------------------	-----	-----------	----------