




CODE COMPOSITION: type + optic + finishing + color

RAY R.1 | 6 W | 500 mA | 700 Lm | CRI > 90

IP54 CE F III A++

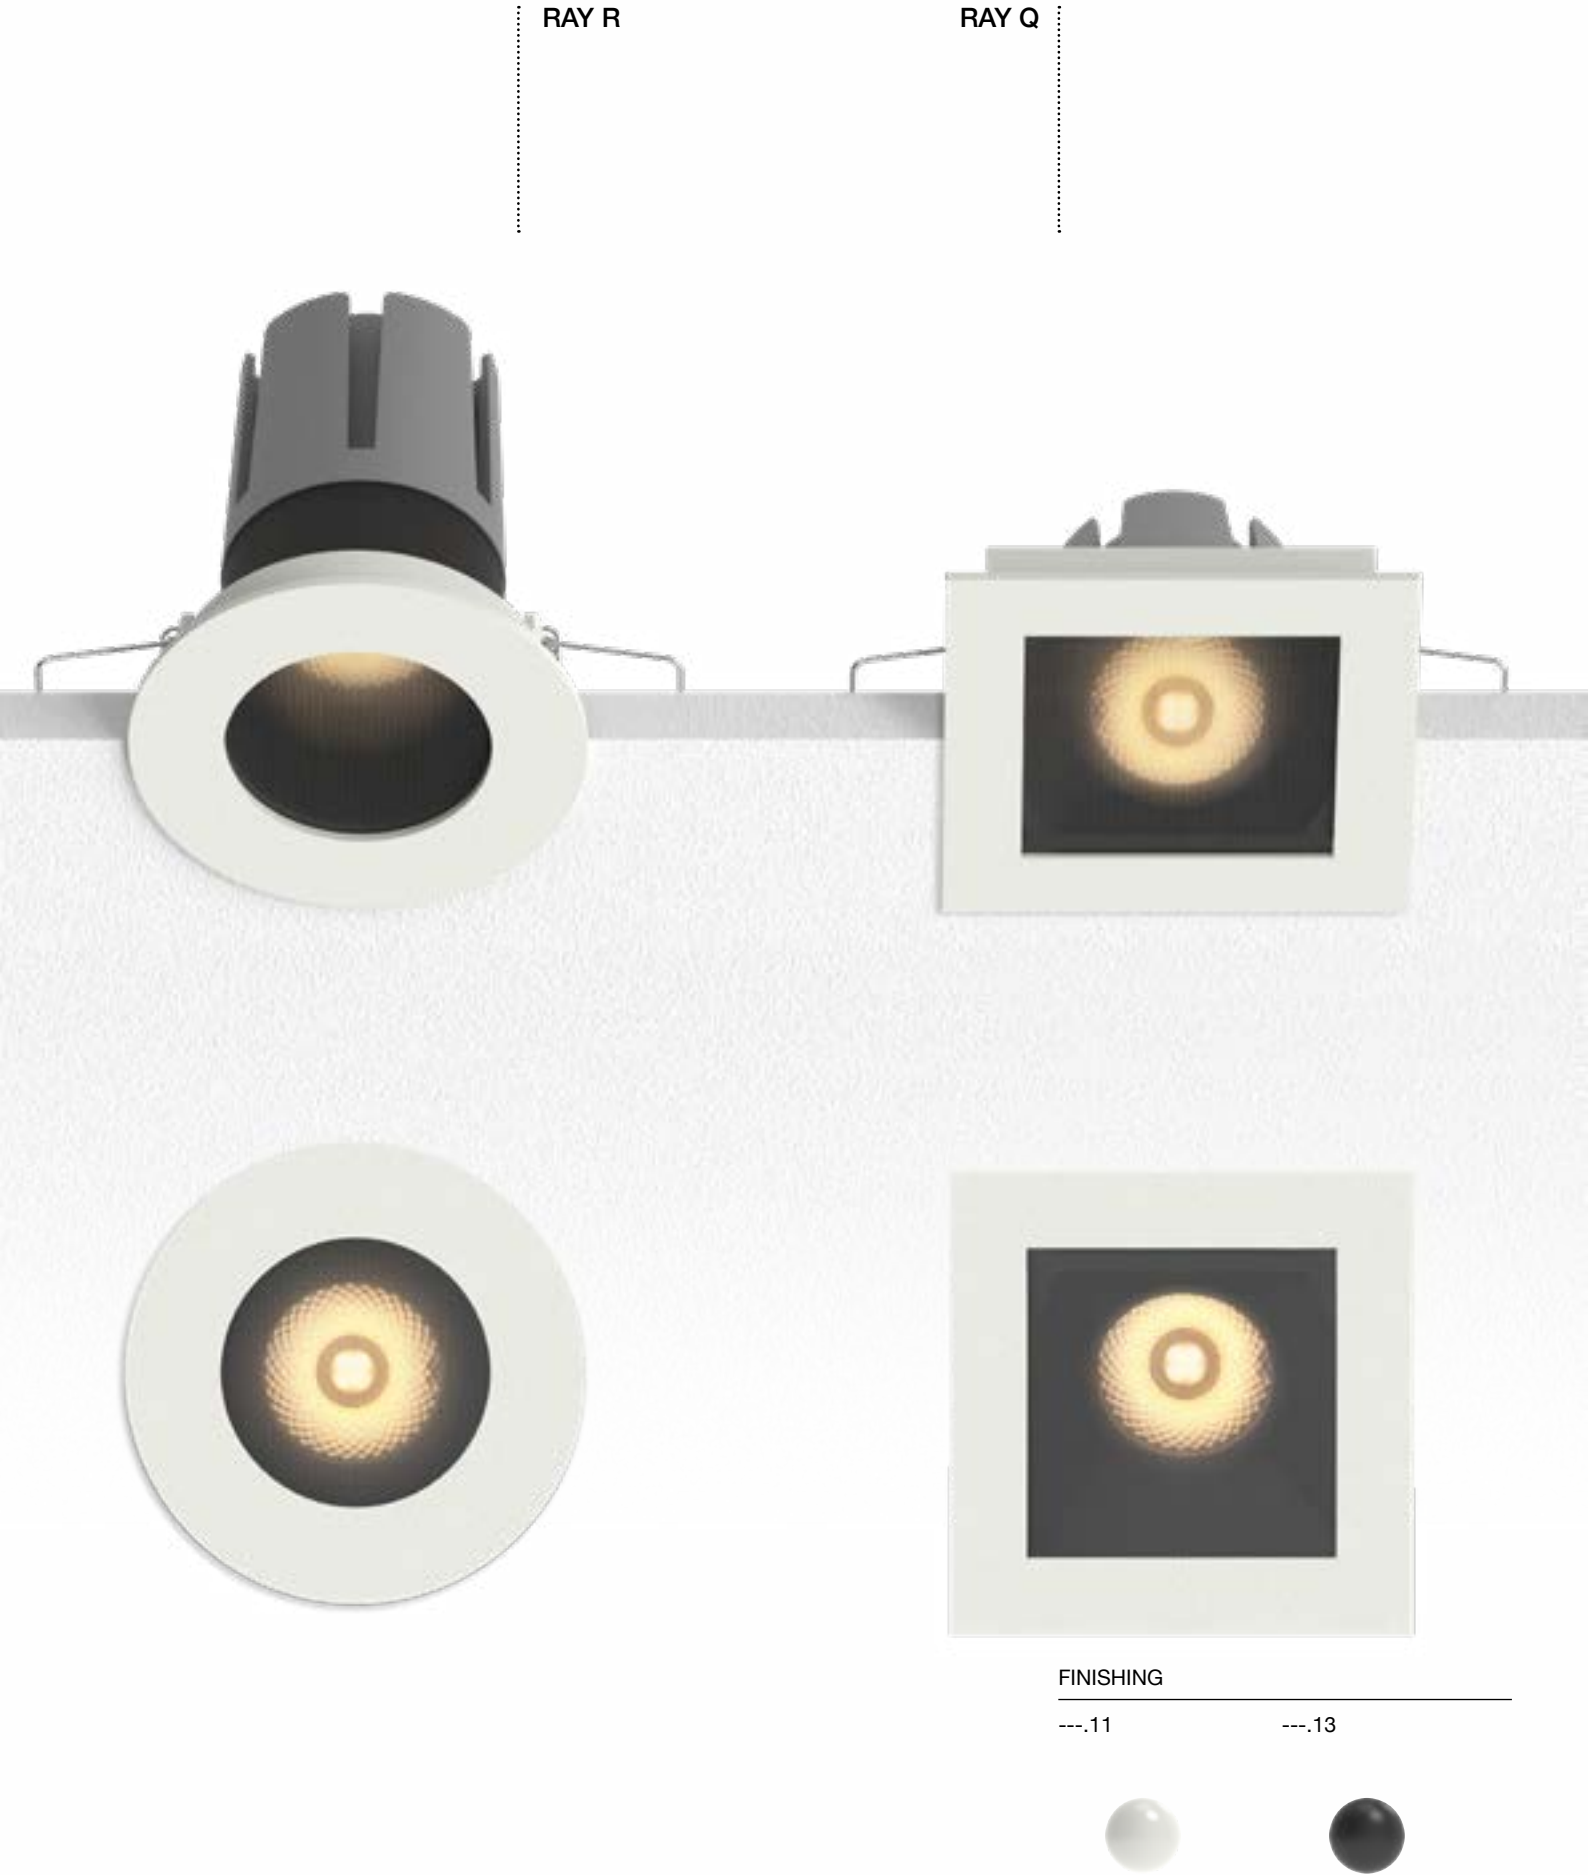

TYPE

11141.

85





88

15°

24°

38°


55°











80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW

Driver remoto **incluso**

Remote Driver **included**



Kit di montaggio **incluso**

Mounting kit **included**



More features

Dimmerabile **DALI**

Dimmable **DALI**

.DA

RAY R.2 | 9 W | 200 mA | 1000 Lm | CRI > 90

IP54 CE F III A++



TYPE

11142.

108





88

15°

24°

38°


55°











80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW

Driver remoto **incluso**

Remote Driver **included**



Kit di montaggio **incluso**

Mounting kit **included**



More features

Dimmerabile **DALI**

Dimmable **DALI**

.DA

RAY R.3 | 12 W | 300 mA | 1320 Lm | CRI > 90

IP54 CE F III A++



TYPE

11143.

108





88

15°

24°

38°


55°











80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW

Driver remoto **incluso**

Remote Driver **included**



Kit di montaggio **incluso**

Mounting kit **included**




More features

Dimmerabile **DALI**

Dimmable **DALI**


.DA

RAY Q.1 | 6 W | 500 mA | 700 Lm | CRI > 90



TYPE

11144.



80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW


Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**

More features


Dimmerabile **DALI** .DA
Dimmable **DALI**

RAY Q.2 | 9 W | 200 mA | 1000 Lm | CRI > 90



TYPE

11145.



80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW



Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**

More features


Dimmerabile **DALI** .DA
Dimmable **DALI**

RAY Q.3 | 12 W | 300 mA | 1320 Lm | CRI > 90



TYPE

11146.



80 mm

Optic

15°	1
24°	2
38°	3
55°	4

Finishing

White	.11
Black	.13

Color

2700 K	.EW
3000 K	.WW
4000 K	.NW

Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**

More features

Dimmerabile **DALI** .DA
Dimmable **DALI**

