


CODE COMPOSITION: type + optic + finishing spot + finishing reflector + color (+ more features)




EARL R.1 | 6 W | 500 mA | 700 Lm | CRI > 90


IP40 CE F A++

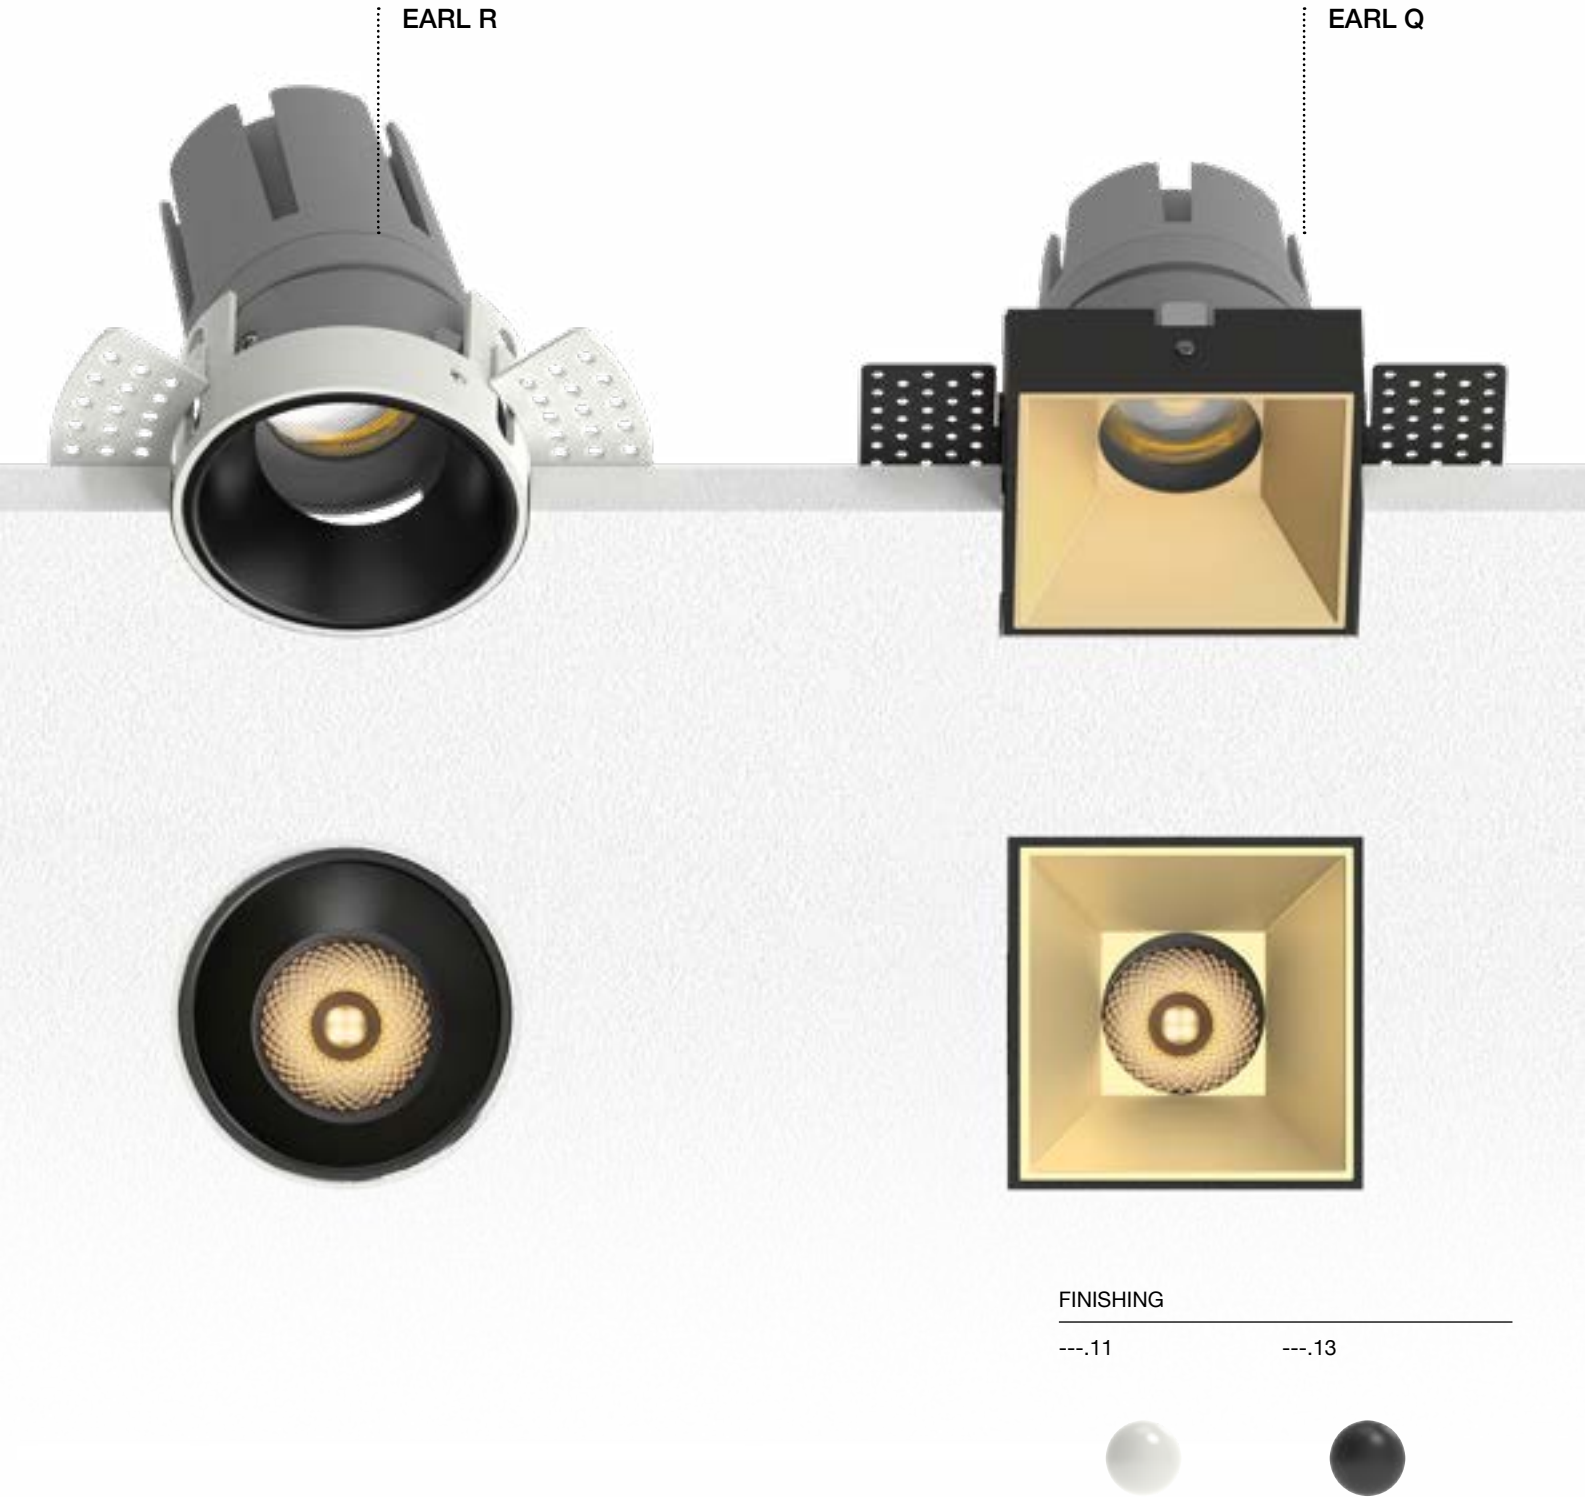

TYPE
11129.

25°
89
71

15° 24° 38° 55°




Optic		Finishing spot	Finishing reflector	Color
15°	1	White .11	White .11	2700 K .EW
24°	2	Black .13	Chrome .20	3000 K .WW
38°	3		Black matt .21	4000 K .NW
55°	4		Gold .22	
			Copper .23	

Driver remoto **incluso**
Remote Driver **included**



Kit di montaggio **incluso**
Mounting kit **included**



More features

Dimmerabile **DALI**
Dimmable **DALI**

.DA


EARL R.2 | 9 W | 200 mA | 1000 Lm | CRI > 90


IP40 CE F A++



TYPE
11130.

25°
112
71

15° 24° 38° 55°




Optic		Finishing spot	Finishing reflector	Color
15°	1	White .11	White .11	2700 K .EW
24°	2	Black .13	Chrome .20	3000 K .WW
38°	3		Black matt .21	4000 K .NW
55°	4		Gold .22	
			Copper .23	

Driver remoto **incluso**
Remote Driver **included**



Kit di montaggio **incluso**
Mounting kit **included**



More features

Dimmerabile **DALI**
Dimmable **DALI**

.DA


EARL R.3 | 12 W | 300 mA | 1320 Lm | CRI > 90


IP40 CE F A++



TYPE
11131.

25°
112
71

15° 24° 38° 55°




Optic		Finishing spot	Finishing reflector	Color
15°	1	White .11	White .11	2700 K .EW
24°	2	Black .13	Chrome .20	3000 K .WW
38°	3		Black matt .21	4000 K .NW
55°	4		Gold .22	
			Copper .23	

Driver remoto **incluso**
Remote Driver **included**



Kit di montaggio **incluso**
Mounting kit **included**





More features

Dimmerabile **DALI**
Dimmable **DALI**



.DA

EARL Q.1 | 6 W | 500 mA | 700 Lm | CRI > 90

IP40 CE F III A++



Optic		Finishing spot		Finishing reflector		Color	
15°	1	White	.11	White	.11	2700 K	.EW
24°	2	Black	.13	Chrome	.20	3000 K	.WW
38°	3			Black matt	.21	4000 K	.NW
55°	4			Gold	.22		
				Copper	.23		



Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**



More features

Dimmerabile **DALI**
Dimmable **DALI**



.DA

EARL Q.2 | 9 W | 200 mA | 1000 Lm | CRI > 90

IP40 CE F III A++



Optic		Finishing spot		Finishing reflector		Color	
15°	1	White	.11	White	.11	2700 K	.EW
24°	2	Black	.13	Chrome	.20	3000 K	.WW
38°	3			Black matt	.21	4000 K	.NW
55°	4			Gold	.22		
				Copper	.23		



Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**



More features

Dimmerabile **DALI**
Dimmable **DALI**



.DA

EARL Q.3 | 12 W | 300 mA | 1320 Lm | CRI > 90

IP40 CE F III A++



Optic		Finishing spot		Finishing reflector		Color	
15°	1	White	.11	White	.11	2700 K	.EW
24°	2	Black	.13	Chrome	.20	3000 K	.WW
38°	3			Black matt	.21	4000 K	.NW
55°	4			Gold	.22		
				Copper	.23		



Driver remoto **incluso**
Remote Driver **included**

Kit di montaggio **incluso**
Mounting kit **included**

More features

Dimmerabile **DALI**
Dimmable **DALI**

.DA

